


## 8-Bit Temperature Smart Sensor (Part # S-TMA-M0XX)

---

The 8-Bit Temperature smart sensor is designed to work with the HOBO® Weather Station logger. The smart sensor has a plug-in modular connector that allows it to be added easily to a HOBO Weather Station. All sensor parameters are stored inside the smart sensor, which automatically communicates configuration information to the logger without any programming, calibration or extensive user setup.

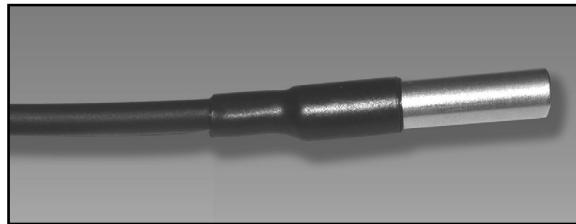

Specifications	8-Bit Temperature Smart Sensor
Measurement Range	-40° to +75°C (-40° to +167°F)
Accuracy	± 0.7°C (+1.3°F) @ +25°C (+77°F) see Figure 1 for detail
Resolution	0.4°C (+0.7°F) @ +25°C (+77°F) see Figure 1 for detail
Drift	< 0.1°C (+0.2°F) per year
Response Time	< 2 minutes typical, in 2 m/sec (4.5 mph) moving air flow, < 1 minute typical in stirred water bath
Operating Temperature Range	-40° to +75°C (-40° to +167°F)
Environmental Rating	Sensor tip and cable jacket: Immersion in water up to +50°C (+122°F) for 1 year
Housing	Stainless steel waterproof sensor tip
Dimensions	0.6 cm x 3.2 cm (1/4 in x 1 1/4 in)
Weight	2 meter: .09 g (3.3 oz) 6 meter: .14 g (5.2 oz) 17 meter: 30 g (11.2 oz)
Bits per Sample	8
Number of Data Channels *	1
Measurement Averaging Option	No
Cable Lengths Available	2 m (6.5 ft) S-TMA-M002 6 m (19.7 ft) S-TMA-M006 17 m (55.7 ft) S-TMA-M017
Length of Smart Sensor Network Cable *	0.1 m (0.3 ft) for all models
Part Numbers	S-TMA-M002 (2 meter cable) S-TMA-M006 (6 meter cable) S-TMA-M017 (17 meter cable)
CE Specification	This product meets CE specification EN61326 criterion C for ESD, criterion C for Radiated Immunity, criterion B for Fast Transient, criterion A for Conducted Immunity, and criterion A for Power Frequency Magnetic Fields. To minimize measurement errors due to ambient RF, use the shortest possible probe cable length and keep the probe cable as far as possible from other cables.

\* A single HOBO Weather Station can accommodate 15 data channels and up to 100 m (328 ft) of smart sensor cable (the digital communications portion of the sensor cables).

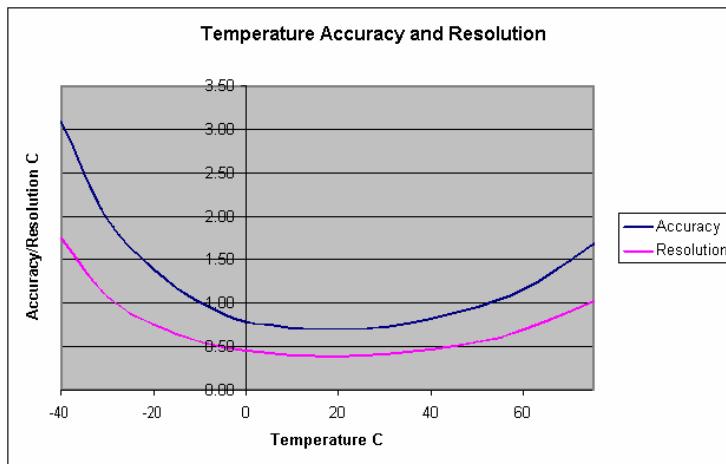


Figure 1: 8-Bit Temperature Smart Sensor Accuracy and Resolution

### Inside this Package

- 8-Bit Temperature Smart Sensor

### Mounting

#### Accessories

- Solar Radiation Shield (Part # M-RSA)

#### Typical Mounting

Solar Radiation Shield: Use the  $\frac{1}{4}$  inch cable clamp, washer, and screw (included with the radiation shield) to secure the 8-Bit Temperature smart sensor in the radiation shield as shown in Figure 2.

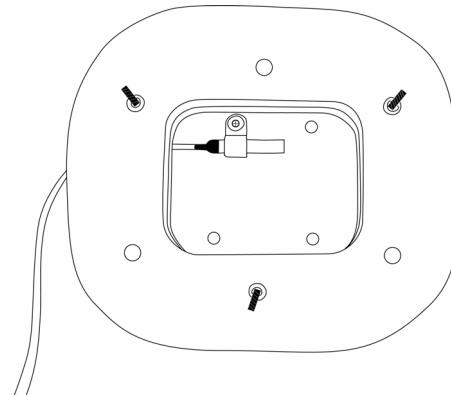


Figure 2: 8-Bit Temperature Smart Sensor Mounted in the Solar Radiation Shield

#### Mounting Considerations

- Mount the sensor so that at least 10 cm (4 inches) of the probe is placed in whatever medium is being measured. The temperature sensor is approximately 1/8 inch from the end of the stainless steel tip.
- If you are running sensor cables along the ground, it is recommended that you use conduit to protect against animals, lawn mowers, exposure to chemicals, etc.

- If you are mounting the sensor in water, place the sensor cable on the side of the mounting post facing downstream. This helps protect the sensor cable from getting damaged by floating debris.
- The Solar Radiation Shield (Part # M-RSA) is strongly recommended when measuring outdoor air temperatures. Solar radiation can significantly affect the air temperature readings.
- Refer to the *HOBO Weather Station User's Guide* for more information regarding setting up complete HOBO Weather Stations.

## **Connecting**

To start using the 8-Bit Temperature smart sensor, stop the logger and insert the sensor's modular jack into an available port on the logger. If a port is not available, use a 1-to-2 adapter (Part # S-ADAPT), which allows you to plug two sensors into one port. The next time you use the HOBO Weather Station, it will automatically detect the new smart sensor. Note that the HOBO Weather Station supports a maximum of 15 data channels; this sensor uses one data channel. Launch the logger and verify that the sensor is functioning correctly. See the *HOBO Weather Station User's Guide* for more details about connecting smart sensors to the HOBO Weather Station.

## **Operating Environment**

The 8-Bit Temperature smart sensor is designed to be used in air, soil, or water. The sensor is designed to last at least one year in water as warm at +50°C (+122°F). If the smart sensor is continually exposed to water for over a year, it will eventually drift. Exposure to water above +50°C (+122°F) is not recommended and may significantly reduce the life of the sensor.

## **Response Time**

The 8-Bit Temperature smart sensor has 90% response times of < 2 minutes. Faster sensor response times are not always better because they are more likely to be affected by transient conditions. Ideally the response time of a sensor should be the same order of magnitude as the logging interval. For typical logging intervals of 10 to 30 minutes, this smart sensor's response time of < 2 minutes is an acceptable match. This smart sensor does not support measurement averaging. Sensor values will not be affected if measurement averaging is selected during launch configuration.

## **Maintenance**

The 8-Bit Temperature smart sensor does not require any maintenance other than an occasional cleaning. If necessary, rinse the sensor with mild soap and fresh water.

## **Verifying Sensor Accuracy**

It is recommended that you check the accuracy of the 8-Bit Temperature smart sensor annually. The 8-Bit Temperature smart sensor cannot be calibrated. Onset uses precision components to obtain accurate measurements. If the smart sensor is not providing accurate data, then it may be damaged, not out of calibration. If you are unsure of the smart sensor's accuracy, you can send it back to Onset for re-certification. Contact Onset or your dealer for a Return Merchandise Authorization (RMA) number before sending it.

## **Warranty**

Onset Computer Corporation (Onset) warrants to the original end-user purchaser for a period of **one year** from the date of original purchase that the HOBO® product(s) purchased will be free from defect in material and workmanship. During the warranty period Onset will, at its option, either repair or replace products that prove to be defective in material or workmanship. This warranty shall terminate and be of

no further effect at the time the product is (1) damaged by extraneous cause such as fire, water, lightning, etc. or not maintained in accordance with the accompanying documentation; (2) modified; (3) improperly installed; (4) repaired by someone other than Onset; or (5) used in a manner or purpose for which the product was not intended.

**THERE ARE NO WARRANTIES BEYOND THE EXPRESSED WARRANTY ABOVE. IN NO EVENT SHALL ONSET BE LIABLE FOR LOSS OF PROFITS OR INDIRECT, CONSEQUENTIAL, INCIDENTAL, SPECIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS CONTRACT OR OBLIGATIONS UNDER THIS CONTRACT, INCLUDING BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, OR ANY OTHER LEGAL THEORY.**

**Limitation of Liability.** The Purchaser's sole remedy and the limit of Onset's liability for any loss whatsoever shall not exceed the Purchaser's price of the product(s). The determination of suitability of products to the specific needs of the Purchaser is solely the Purchaser's responsibility. **THERE ARE NO WARRANTIES BEYOND THE EXPRESSED WARRANTY OFFERED WITH THIS PRODUCT. EXCEPT AS SPECIFICALLY PROVIDED IN THIS DOCUMENT, THERE ARE NO OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO INFORMATION OR ADVICE GIVEN BY ONSET, ITS AGENTS OR EMPLOYEES SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THE EXPRESSED WARRANTY OFFERED WITH THIS PRODUCT.**

**Indemnification.** Products supplied by Onset are not designed, intended, or authorized for use as components intended for surgical implant or ingestion into the body or other applications involving life-support, or for any application in which the failure of the Onset-supplied product could create or contribute to a situation where personal injury or death may occur. Products supplied by Onset are not designed, intended, or authorized for use in or with any nuclear installation or activity. Products supplied by Onset are not designed, intended, or authorized for use in any aeronautical or related application. Should any Onset-supplied product or equipment be used in any application involving surgical implant or ingestion, life-support, or where failure of the product could lead to personal injury or death, or should any Onset-supplied product or equipment be used in or with any nuclear installation or activity, or in or with any aeronautical or related application or activity, Purchaser will indemnify Onset and hold Onset harmless from any liability or damage whatsoever arising out of the use of the product and/or equipment in such manner.

## **Returns**

Please direct all warranty claims and repair requests to place of purchase.

Before returning a failed unit directly to Onset, you must obtain a Return Merchandise Authorization (RMA) number from Onset. You must provide proof that you purchased the Onset product(s) directly from Onset (purchase order number or Onset invoice number). Onset will issue an RMA number that is valid for 30 days. You must ship the product(s), properly packaged against further damage, to Onset (at your expense) with the RMA number marked clearly on the outside of the package. Onset is not responsible for any package that is returned without a valid RMA number or for the loss of the package by any shipping company. Loggers and sensors must be clean before they are sent back to Onset or they may be returned to you.

**Repair Policy**

Products that are returned after the warranty period or are damaged by the customer as specified in the warranty provisions can be returned to Onset with a valid RMA number for evaluation.

**ASAP Repair Policy**

For an additional charge, Onset will expedite the repair of a returned product.

**Tune Up Service**

Onset will examine and retest any HOBO data logger or sensor.

---

© 2001–2004 Onset Computer Corporation. All rights reserved.  
Onset and HOBO are trademarks of Onset Computer Corporation.

 The CE Marking identifies this product as complying with all relevant directives in the European Union (EU).

Part #: MAN-S-TMA  
Document #: 5933-C