

# OM-50 Series Portable Low Cost Data Loggers Part of the NOMAD® Family


OM-50 Series

**\$69**

Basic Unit

- ✓ Model OM-51 Monitors Contact Closures
- ✓ Model OM-52 for Motor On/Off Applications
- ✓ Model OM-53 Monitors Light On/Off Conditions
- ✓ Easy-to Use Windows Software

OM-50 Series data loggers record when devices change between on and off or open and closed states and store the time, date and state for each change (the black arrows in the diagram below show when data is recorded).

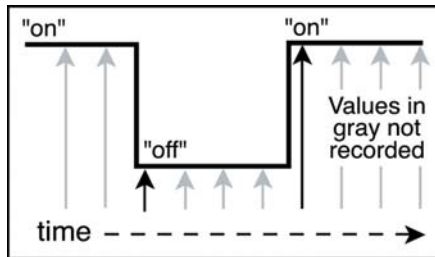

OM-51 monitors contact closures

These data loggers have two LED indicator lights, one red and one green. One of these LED's will blink every two seconds. If the contact is open or the device is off, the red LED will blink. If the contact is closed or the device is on, then the green LED will blink. Although the LED's blink every other second, the state is checked every half second, with state changes recorded as detected. Simply connect the data logger to your PC using the RS-232 cable and download stored data using the Windows software.

Model OM-51 State Data logger has two inputs, a magnetic reed switch located in the middle of the hinge of the case (opposite the connectors), and an external contact closure input. The data logger records contact closures/openings of its internal magnetic reed switch and contact closures (open/shorted) in a cable connected to its 2.5 mm stereo jack.



The threshold is adjusted by turning a light sensitivity control on the front of the data logger.

The OM-53's light sensitivity is peaked in the forward direction as shown in the light sensor angular response plot below.


This directionality can be taken advantage of to minimize the effect of other light sources when trying to determine the on/off state of a particular light source. The light sensor is on the side of the case next to the green LED. Note, however, that the sensor detects light directed at the front of the case.

OM-51 data logger, \$69, shown larger than actual size

The OM-51 data logger detects the cable's open/shorted condition by applying a positive voltage pulse to the tip (white wire in the cable).

Model OM-52 Motor On/Off data logger uses an AC magnetic field threshold sensor to determine if a motor is on or off. The AC magnetic field threshold is approximately 2 Gauss at 60 Hz. Position the logger so that its green LED blinks when the motor is on. It is usually best to mount the datalogger on the side of the motor.

Model OM-53 Light On/Off Datalogger has a light intensity threshold that is adjustable from approximately 10 to 100 lumens.

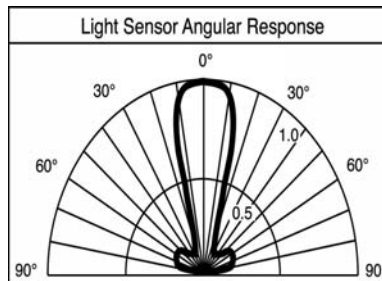

## Specifications

### GENERAL

#### Measurement Capacity:

2000 state changes

**Time Resolution:** 0.5 seconds

**Minimum State Duration:**

0.5 seconds

**Memory Modes:** Stop when full, wrap-around when full (user selectable)

**Memory:** Non-volatile EEPROM memory retains data even if battery fails

**Operation:** Blinking LED lights show current state

**Time Accuracy:** ±1 minute per week at 20°C (68°F)

**Operating Temperature:**

-20 to 70°C (-4 to 158°F)

**Operating Humidity:**

0 to 95% non-condensing

**Storage Temperature:**

-20 to 70°C (-4 to 158°F)

**Power:** 3.6 V lithium battery

**Battery Life:** 1 year

**Dimensions:** 68 x 48 x 19 mm (2.4 H x 1.9 W x 0.8 D)

**Weight:** 29 g (1 oz)

**Measurement Specifications**

**OM-51 STATE DATA LOGGER**

**Inputs (two inputs):**

A magnetic sensor mounted in the datalogger and an external cable for detecting contact closures (external cable is included).

**Spacing Between Data logger and External Magnet:**

Closed, less than or equal to 3/4"; open, greater than or equal to 3/4" (external magnet is included)

**External Contact Input:**

Passive relay switch or contact closure

**OM-52 MOTOR ON/OFF DATA LOGGER**

**Sensor Type:**

AC field sensor Magnetic Field Threshold: approx. 2 Gauss at 60 Hz; the logger will typically work with AC motors drawing 1A or more

**Mounting:**

Mount the data logger on or close to the motor housing or to one phase of the power line to the equipment being monitored


**Angular Response:**

The data logger is sensitive to that part of the AC field that is perpendicular to the datalogger's face

**OM-53 LIGHT ON/OFF DATA LOGGER**

**Light Threshold Adjustment Range:**

Approx. 10 to 300 foot-candles (fluorescent light); the data logger's sensitivity to incandescent light is about ten times greater (see plot on previous page)

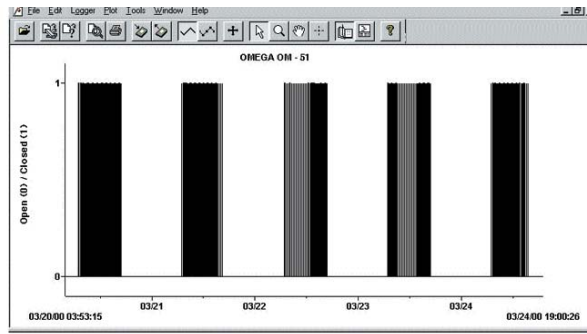


OM-51 Time-based data plot



OM-52, \$69, shown larger than actual size



OM-53, \$69, shown larger than actual size

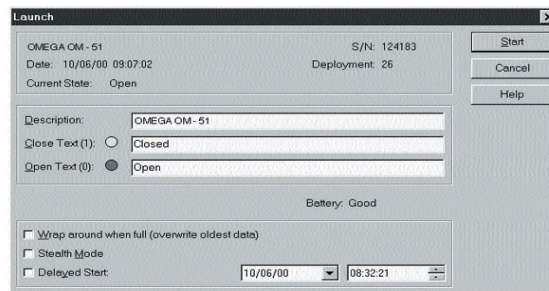

Data logger launch menu

**ALL MODELS AVAILABLE FOR FAST DELIVERY!**

To Order (Specify Model Number)		
Model No.	Price	Description
OM-51	\$69	State data logger
OM-52	69	Motor on/off data logger
OM-53	69	Light on/off data logger
RD-TEMP-SW-A	20	Windows 98/NT/2000/XP software and RS-232 interface cable with DB9F termination for OM-50 Series data loggers
OM-40-BATT	19	Replacement 3.6V lithium battery for OM-50 Series (package of 10)

Data loggers are supplied with complete operator's manual and mounting kit (hook/loop, magnet and tape). Model OM-51 State Data logger includes external magnet and external input cable for detecting contact closures.

Ordering Example: OM-51 state data logger and RD-TEMP-SW-A Windows software, \$69 + 20 = \$89.



#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters