




# Self-Adhesive Thermocouples Molded Silicone Design for Curved and Flat Surfaces

SA2 Series  
Starts at  
**\$30**



- ✓ Ultra-Slim Silicone Rubber for Maximum Flexibility
- ✓ Self-Adhesive Foil Backing for Faster Response Time
- ✓ 2 Styles Available for Flat or Curved Surfaces
- ✓ Resistant to a Variety of Chemicals and Oils
- ✓ Temperature Range -50 to 200°C (-58 to 392°F)
- ✓ Available in J, K, T and E—Color Coded for Instant Thermocouple Recognition
- ✓ 24 AWG Stranded Thermocouple-Grade Lead Wire
- ✓ Stripped Leads Standard (A Variety of Connector Options Are Available)

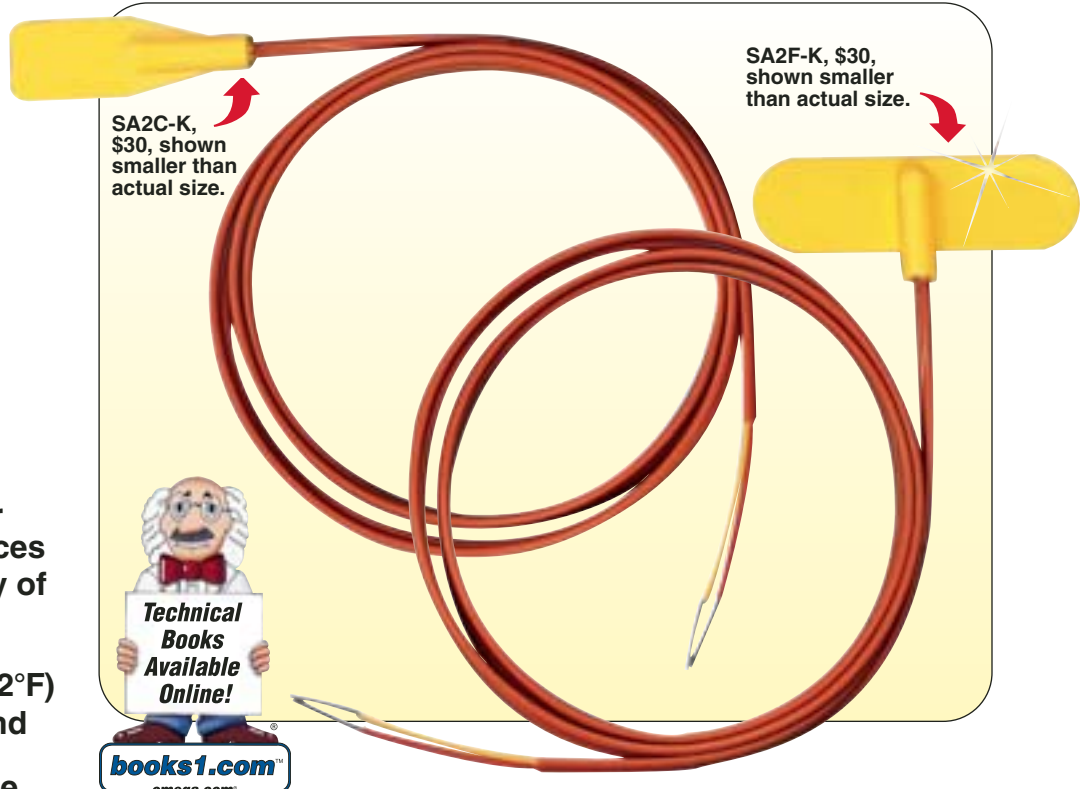

SA2C-K, \$30, shown smaller than actual size.

SA2F-K, \$30, shown smaller than actual size.



These sensors are available in 2 different mounting styles for flat or curved surfaces. The integral thermocouple sensor is bonded onto the inner surface of the self adhesive aluminum foil strip, which is provided for faster response times.

## Specifications

### Dimensions:

**SA2C:** 15 x 50 x 6.4 mm (0.59 x 1.97 x 0.25")

**SA2F:** 35 x 12 x 6.4 mm (1.38 x 0.47 x 0.25")

**Wire:** 24 AWG stranded thermocouple wire, 1 m (40") and 2 m (80") lengths; custom lengths available

**MOST POPULAR MODELS HIGHLIGHTED!**

To Order (Specify Model Number)		
Model No.	Price	Description
SA2C-(*)	\$30	15 x 50 mm (0.59 x 1.97") curved surface sensor, 1 m (40") lead wire, stripped ends
SA2C-(*)-72	33	15 x 50 mm (0.59 x 1.97") curved surface sensor, 2 m (80") lead wire, stripped ends
SA2C-(*)-120	37	15 x 50 mm (0.59 x 1.97") curved surface sensor, 3 m (120") lead wire, stripped ends
SA2C-(*)-SMPW-CC	35	15 x 50 mm (0.59 x 1.97") curved surface sensor, 1 m (40") lead wire, ultimate mini male connector
SA2F-(*)	30	35 x 12 mm (1.38 x 0.47") flat surface sensor, 1 m (40") lead wire, stripped ends
SA2F-(*)-72	33	35 x 12 mm (1.38 x 0.47") flat surface sensor, 2 m (80") lead wire, stripped ends
SA2F-(*)-120	37	35 x 12 mm (1.38 x 0.47") flat surface sensor, 3 m (120") lead wire, stripped ends
SA2F-(*)-SMPW-CC	35	35 x 12 mm (1.38 x 0.47") flat surface sensor, 1 m (40") lead wire, ultimate mini male connector

\* Specify J, K, T or E thermocouple type.

For standard size connector, replace "SMPW-CC" in the part number and replace with "OSTW-CC", no additional charge. For additional lead wire, add \$1 per 300 mm (12").

**Ordering Example:** SA2C-K-72-SMPW-CC, self-adhesive silicone sensor for curved surfaces, Type K, 2 m (80") lead wire with ultimate mini male cable clamp connector, \$35 + \$3 (3 ft x \$1) = \$38.



#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters